


SPEAKFIL-YDY 2351 2x0.25 P
Code - 2351

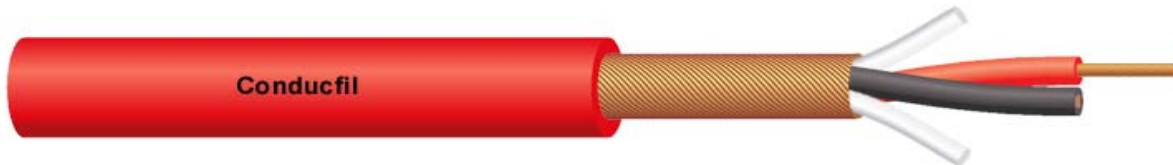

Description

Bare copper conductor. PVC insulation. Lay up conductors. Bare copper spiral shield. PVC-NBR outer sheath.

PHYSICAL CHARACTERISTICS

Conductor

Material	Bare copper
Section (mm ²)	0,25
AWG	23
Composition	32 x 0,10

Insulation

Material	PVC
Diameter (mm)	1,45
Colour	Red and Black

Semiconductor shield

Material	NO
Diameter (mm)	
Colour	

Lay up

Composition	2 conductors.
-------------	---------------

Protection

Material	NO
----------	----



SPEAKFIL-YDY 2851 2x0.25 P
Código - 2351

Inner sheath

Material	NO
Diameter (mm)	
Colour	

Outer shield

1st Shield	
Material	
Coverage	95 - 100 %
2nd Shield	NO
Material	
Coverage	

Outer shield

Material	PVC-NBR
Diameter (mm)	6,40
Colour	Several

Printing

Inscription	Conducfil
-------------	-----------

Supply

Packing	To be defined
---------	---------------

MECHANICAL CHARACTERISTICS

Appox. Weight	54 Kg/km
Operating temperature range	-20 / +80
Minimum bending radius	128 mm

ELECTRICAL CHARACTERISTICS

Conductor DC resistance at 20° C	71,8 Ohms/km
Shield DC resistance at 20° C	22,1 Ohms/Km
Nominal capacitance	140 pF/m
Insulation resistance	>150 Mohms * Km
Voltage test	1500 v



SPEAKFIL-YDY 2851 2x0.25 P
Código - 2351

SAFETY

FLAME TEST

		Compliance
Test for vertical flame spread	IEC-60332-1	<input type="checkbox"/>
Test for vertical flame spread	IEC-60332-2	<input type="checkbox"/>
Test for vertical flame spread	IEC-60332-3	<input type="checkbox"/>
It does not emite toxic fumes or halogens	IEC-754-1	<input type="checkbox"/>
It does not emite corrosive fumes or halogens	IEC-754-2	<input type="checkbox"/>
Low emision of dense fumes	IEC-1034-1	<input type="checkbox"/>

ENVIRONMENT

		Compliance
Content of hazardous sustances	Directive 2002/95/CE	<input checked="" type="checkbox"/>

APPLICABLE SPECIFICATIONS

		Compliance
Conductor material	UNE-EN 60228	<input checked="" type="checkbox"/>
Insulation material	UNE-EN 50290	<input checked="" type="checkbox"/>