





0.55 +0.02  
 5-30 +0.04  
 30-120 +0.08  
 120-315 +0.1  
 315-1000 +0.16  
 1000-2000 +0.24



RECOMMENDED  
 CABLE STRIPPING DIM'S  
 (建議剝線尺寸)

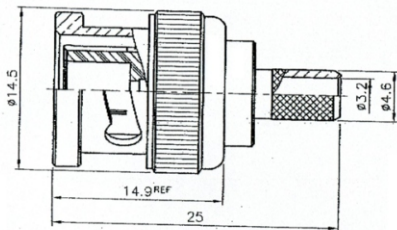

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE  
 HEX CRIMP SIZE .213" (5.41mm)  
 (套管壓接工具)
2. CRIMPED CONTACT PIN  
 HEX CRIMP SIZE .068" (1.72mm)  
 (中心針壓接工具)

RoHS COMPLIANT

APPROVED BY :

UNITED AU-VI CO., LTD.



Description:

BNC MALE CRIMP RG58/U

Part No.:

V-7001AO

**ULTIMAX**<sup>®</sup>  
 THE ULTIMATE ELECTRONIC COMPONENTS

Date: JUN 07 2013

File No.: 7011NS501CF007B

9	FERRULE		NOTE 4	NOTE 2
8	CONTACT PIN		NOTE 1	NOTE 3
7	SHELL		NOTE 1	NOTE 2
6	GASKET		SILICONE	RED
5	WASHER		SS41	NOTE 2
4	C RING		SK5	NOTE 2
3	WASHER		SS41	NOTE 2
2	INSULATOR		DELTRIN	WHITE
1	BODY		NOTE 1	NOTE 2
NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH