




DIMENSIONS ARE IN MILLIMETERS

0.5-5+/-0.2
5-30+/-0.4
30-120+/-0.6
120-315+/-1
315-1000+/-1.6
1000-2000+/-2.4

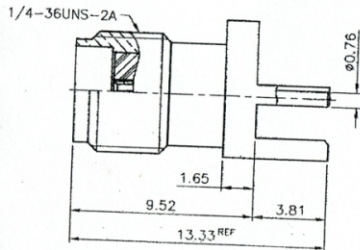

PCB THICKNESS 1.57mm
MATERIAL: DOUBLE-SIDED FR 4 WITH
1 oz. COPPER ON BOTH SIDES

RECOMMENDED MOUNTING PATTERN:

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLIUM COPPER PER QQ-C-530

APPROVED BY:



UNITED AU-VI CO., LTD.

Description: SMA END LAUNCH JACK (FOR 1.57 BOARD THICKNESS)

Part No.: V-7845CG

ULTIMAX®
THE ULTIMATE ELECTRONIC COMPONENTS

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY
-----	-------------	----------	--------	------

Date: APR 02 2014

File No. 7867LS502BD003B

3	CONTACT PIN	NOTE 5	NOTE 3	
2	INSULATOR	NOTE 4	WHITE	
1	BODY	NOTE 1	NOTE 2	